

ALCOTEST 9510 PARAMETER REPORT

Equipment

Serial No.: ARMJ-0294
Firmware: 8326739 1.5
WinCE application: 8326738 2.9
Configuration: 8326737 3.10

Date: 04/28/2026
Time: 08:38:58

Parameter

min. blow time	5.0	s
min. breath volume for females of age 60+	1.2	L
min. breath volume for all other	1.5	L
min. blow flow	4.5	L/min
plateau detection limit	4	%
plateau detection start conc.	70	microgram/L
neg. flow detection (part. vacuum)	10.0	hPa
neg. flow detection sensitivity	10	
cal. gas abort volume	0.4	L
result-to-zero limit	0.0050	%BAC
ambient air check limit	0.0049	%BAC
interference det. d-criterion limit abs.	38	microgram/L
interference det. d-criterion limit rel.	10.0	%
interference det. t-criterion limit abs.	8	microgram/L
interference det. t-criterion limit rel.	2.1	%
IR CO2 offset	10	microgram/L
IR H2O offset	4	microgram/L
EC H2O offset	0	microgram/L
Value-based EC aging comp. on/off (1/0)	0	
Time-based EC aging comp. on/off (1/0)	1	
Time-based EC aging comp. per month	0.2	%
Time-based EC aging comp. maximum	3.0	%
EC fatigue comp. max. sum	15000	
EC fatigue comp. factor	50	
EC fatigue comp. minutes	180	
mouth alc. mark limit	500	
mouth alc. lower limit	30	
mouth alc. slope	6	
mouth alc. zero limit	50	
mouth alc. max. neg. sum	6	
mouth alc. max. 2nd derivative	35	

ALCOTEST 9510 CERTIFICATION REPORT - WET ADJUST (PART I)
South Brunswick

Equipment

Inst. Model No.:	ALCOTEST 9510	Serial No.:	ARMJ-0294		
Firmware:	8326739 1.5	Config.:	8326737 3.10	WinCE:	8326738 2.9

Wet Adjust Record

Wet Adjust File No.:	70	Wet Adjust Date:	04/28/2026	Wet Adjust No.:	4
		Wet Adjust Time:	09:17:45		

Concentration:	0.100 %	Adj. Unit Ser. No.:	ARRD-0003	Adj. Unit Exp.:	07/21/2026
Adjusting Unit:	X-Cal 2000	Soln. Bottle No.:	1354	Adjust Soln. Exp.:	06/11/2026
Solution Lot No.:	24210				

Preadjust Simulator Temp.:	34.01 degree C
Postadjust Simulator Temp.:	34.01 degree C

Result

Procedure completed successfully.

Coordinator

Last Name: Rubbe -	First Name: Anthony	MI: P.	Badge No.: 8352
--------------------	---------------------	--------	-----------------

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

TPR A RM 8352

Signed:	Date: 04/28/2026	ID: 3018
---------	------------------	----------

ALCOTEST 9510 CERTIFICATION REPORT - DRY ADJUST (PART II)
South Brunswick

Equipment

Inst. Model No.:	ALCOTEST 9510	Serial No.:	ARMJ-0294		
Firmware:	8326739 1.5	Config.:	8326737 3.10	WinCE:	8326738 2.9

Dry Adjust Record

Dry Adjust File No.:	71	Dry Adjust Date:	04/28/2026	Dry Adjust No.:	4
		Dry Adjust Time:	09:36:57		

Concentration:	0.100 %				
Dry Gas Lot No.:	302-403034216	Adjust Gas Exp.:	04/30/2027		
Barom. Model No.:	Mensor CPG2300	Barom. Serial No.:	4100126W	Barom. Cert. Exp.:	09/03/2026
Pre-adjust Amb. Pressure:		1016 hPa	Post-adjust Amb. Pressure:		1019 hPa

Result

Procedure completed successfully.

Coordinator

Last Name: Rubbe -	First Name: Anthony	MI: P.	Badge No.: 8352
--------------------	---------------------	--------	-----------------

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

TPR. A Rubbe 8352

Signed:

Date: 04/28/2026

ID: 3018

ALCOTEST 9510 CERTIFICATION REPORT - LINEARITY (PART III)
South Brunswick

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMJ-0294
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9

Linearity Record

Linearity File No.: 72 Lin. Date: 04/28/2026 Lin. No.: 4

0.040% Dry Gas Lot No.: 302-402999655 Adjust. Gas Exp.: 03/20/2027
0.080% Dry Gas Lot No.: 302-403008479 Adjust. Gas Exp.: 03/28/2027
0.160% Dry Gas Lot No.: 302-402922402 Adjust. Gas Exp.: 12/14/2026
0.300% Dry Gas Lot No.: 302-402757219 Adjust. Gas Exp.: 05/30/2026

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	09:53:03		*TEST PASSED*
Control .04 Test 1 EC	0.039	09:53:38	1018	*TEST PASSED*
Control .04 Test 1 IR	0.039	09:53:38	1018	*TEST PASSED*
Ambient Air Blank	0.000	09:54:27		*TEST PASSED*
Control .04 Test 2 EC	0.040	09:54:39	1018	*TEST PASSED*
Control .04 Test 2 IR	0.039	09:54:39	1018	*TEST PASSED*
Ambient Air Blank	0.000	09:55:44		*TEST PASSED*
Control .08 Test 3 EC	0.078	09:56:17	1018	*TEST PASSED*
Control .08 Test 3 IR	0.078	09:56:17	1018	*TEST PASSED*
Ambient Air Blank	0.000	09:57:11		*TEST PASSED*
Control .08 Test 4 EC	0.080	09:57:22	1018	*TEST PASSED*
Control .08 Test 4 IR	0.079	09:57:22	1018	*TEST PASSED*
Ambient Air Blank	0.000	09:58:37		*TEST PASSED*
Control .16 Test 5 EC	0.157	09:59:11	1018	*TEST PASSED*
Control .16 Test 5 IR	0.158	09:59:11	1018	*TEST PASSED*
Ambient Air Blank	0.000	10:00:11		*TEST PASSED*
Control .16 Test 6 EC	0.159	10:00:23	1018	*TEST PASSED*
Control .16 Test 6 IR	0.161	10:00:23	1018	*TEST PASSED*
Ambient Air Blank	0.000	10:19:24		*TEST PASSED*
Control .30 Test 7 EC	0.301	10:20:01	1018	*TEST PASSED*
Control .30 Test 7 IR	0.302	10:20:01	1018	*TEST PASSED*
Ambient Air Blank	0.000	10:21:08		*TEST PASSED*
Control .30 Test 8 EC	0.305	10:21:23	1018	*TEST PASSED*
Control .30 Test 8 IR	0.305	10:21:23	1018	*TEST PASSED*
Ambient Air Blank	0.000	10:21:38		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Rubbe - First Name: Anthony MI: P. Badge No.: 8352

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

TDR. A. Rubbe 8352

Signed:

Date: 04/28/2026

ID: 3018

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 1
South Brunswick
SERIAL NUMBER: ARMJ-0294

Equipment

Inst. Model No.:	ALCOTEST 9510	Serial No.:	ARMJ-0294		
Firmware:	8326739 1.5	Config.:	8326737 3.10	WinCE:	8326738 2.9
Cyl1 Install File No.:	73	Cyl1 Install Date:	04/28/2026	Cyl1 Install No.:	4

Control Tests (0.100%)

Installation Inlet:	#1 (Upper)	Post test active Cyl.:	#1 (Upper)
Dry Gas Lot No.:	302-403034219	Dry Gas Lot Exp.:	05/01/2027

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	10:34:09		*TEST PASSED*
Control Test 1			1018	*TEST PASSED*
EC Result	0.100	10:34:54		*TEST PASSED*
IR Result	0.099	10:34:54		*TEST PASSED*
Ambient Air Blank	0.000	10:35:51		*TEST PASSED*
Control Test 2			1018	*TEST PASSED*
EC Result	0.100	10:36:15		*TEST PASSED*
IR Result	0.100	10:36:15		*TEST PASSED*
Ambient Air Blank	0.000	10:37:11		*TEST PASSED*
Control Test 3			1018	*TEST PASSED*
EC Result	0.101	10:37:35		*TEST PASSED*
IR Result	0.100	10:37:35		*TEST PASSED*
Ambient Air Blank	0.000	10:37:50		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Rubbe -	First Name: Anthony	MI: P.	Badge No.: 8352
--------------------	---------------------	--------	-----------------

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

TPR. A. Rubbe 8352

Signed:

Date: 04/28/2026

ID: 3018

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 2
South Brunswick
SERIAL NUMBER: ARMJ-0294

Equipment

Inst. Model No.:	ALCOTEST 9510	Serial No.:	ARMJ-0294		
Firmware:	8326739 1.5	Config.:	8326737 3.10	WinCE:	8326738 2.9
Cyl2 Install File No.:	74	Cyl2 Install Date:	04/28/2026	Cyl2 Install No.:	4

Control Tests (0.100%)

Installation Inlet:	#2 (Lower)	Post test active Cyl.:	#1 (Upper)
Dry Gas Lot No.:	302-403368144	Dry Gas Lot Exp.:	06/13/2028

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	10:44:15		*TEST PASSED*
Control Test 1			1018	*TEST PASSED*
EC Result	0.100	10:45:00		*TEST PASSED*
IR Result	0.100	10:45:00		*TEST PASSED*
Ambient Air Blank	0.000	10:45:58		*TEST PASSED*
Control Test 2			1018	*TEST PASSED*
EC Result	0.101	10:46:21		*TEST PASSED*
IR Result	0.101	10:46:21		*TEST PASSED*
Ambient Air Blank	0.000	10:47:18		*TEST PASSED*
Control Test 3			1018	*TEST PASSED*
EC Result	0.101	10:47:41		*TEST PASSED*
IR Result	0.101	10:47:41		*TEST PASSED*
Ambient Air Blank	0.000	10:47:57		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Rubbe -	First Name: Anthony	MI: P.	Badge No.: 8352
--------------------	---------------------	--------	-----------------

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

TPR A. Rubbe

Signed:

Date: 04/28/2026

ID: 3018

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130435101
Date: May 28, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.
CALGAZ LOT#: 302-403034219
ETHANOL IN NITROGEN

Manufactured Date: May 01, 2024
Product Expiration: May 01, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	263.0	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1140199442

Date: June 18, 2025

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.

CALGAZ LOT#: 302-403368144

Manufactured Date: June 13, 2025

ETHANOL IN NITROGEN

Product Expiration: June 13, 2028

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	262.7	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND49826	260.1

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.
Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:




"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

Fax: (410) 228-4251

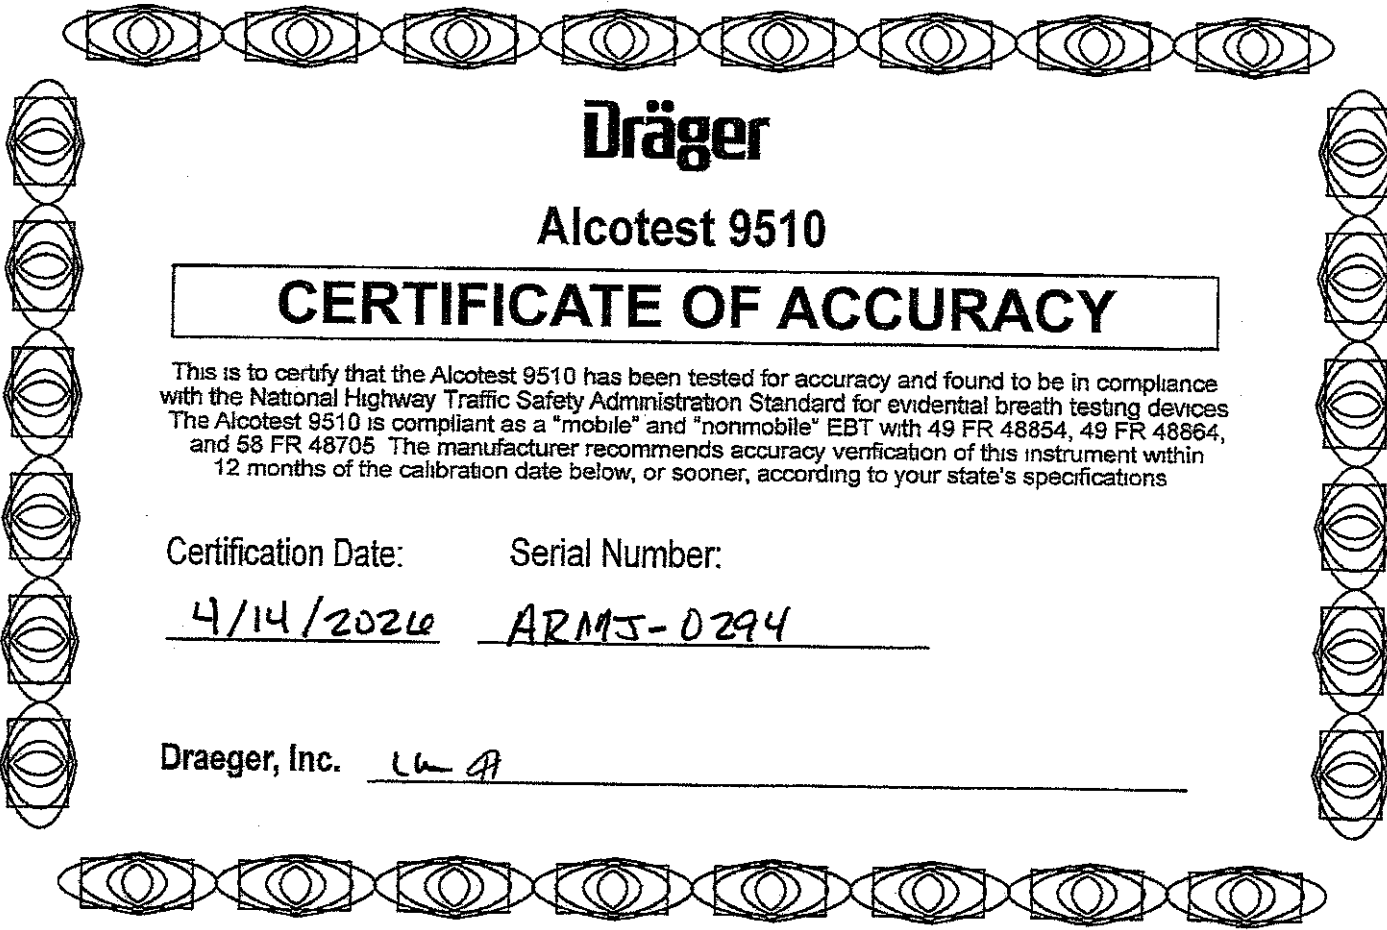

Dräger

Alcotest 9510

CERTIFICATE OF ACCURACY

This is to certify that the Alcotest 9510 has been tested for accuracy and found to be in compliance with the National Highway Traffic Safety Administration Standard for evidential breath testing devices. The Alcotest 9510 is compliant as a "mobile" and "nonmobile" EBT with 49 FR 48854, 49 FR 48864, and 58 FR 48705. The manufacturer recommends accuracy verification of this instrument within 12 months of the calibration date below, or sooner, according to your state's specifications.

Certification Date:

Serial Number:

4/14/2026

ARMJ-0294

Draeger, Inc.

LM A



State of New Jersey

OFFICE OF THE ATTORNEY GENERAL
DEPARTMENT OF LAW AND PUBLIC SAFETY
DIVISION OF STATE POLICE
POST OFFICE BOX 7068
WEST TRENTON, NJ 08628-0068
(609) 882-2000

PHILIP D. MURPHY
Governor

TAHESHA L. WAY
Lt. Governor

MATTHEW J. PLATKIN
Attorney General

COLONEL PATRICK J. CALLAHAN
Superintendent

CERTIFICATION OF ANALYSIS 0.100 PERCENT BREATH ALCOHOL SIMULATOR SOLUTION

ACCEPTANCE SPECIFICATIONS FOR BREATH ALCOHOL SIMULATOR SOLUTION: Ethyl alcohol concentration within, but not exceeding, the range of 0.1174 to 0.1246 grams per 100 milliliters of solution.

MANUFACTURER: Draeger, Inc.

ANALYSIS DATE: 07/18/2024

BREATH ALCOHOL SIMULATOR SOLUTION LOT NUMBER: 24210

Representative samples of the above-referenced Lot Number were tested by Gas Chromatography and found to have a mean ethyl alcohol concentration range of 0.1195 to 0.1217 grams per 100 milliliters of solution.

This lot of breath alcohol simulator solution may be utilized as a known traceable standard for the purpose of conducting periodic tests, pursuant to N.J.A.C. 13:51-4.3, of approved breath test instruments (N.J.A.C. 13:51-3.5) utilized by law enforcement agencies in this State. The manufacturer's expiration date for this lot of breath alcohol simulator solution is June 11, 2026.

As OFS Director for the Division of State Police, I hereby certify and attest that the tests and results documented in this Certificate of Analysis were performed at the Office of Forensic Sciences of the Division of State Police on properly functioning and calibrated instruments and equipment. All procedures utilized are accurate, objective, and performed on a routine basis by personnel within the Office of Forensic Sciences, in accordance with their professional duties and responsibilities.

Michael Kennedy
Michael Kennedy
Director
NJSP Office of Forensic Sciences

Sworn to and subscribed before me this 24 day of July, 2024.

Notary

KAREN E. STAHL
NOTARY PUBLIC OF NEW JERSEY
Commission # 50110522
My Commission Expires 8/13/2024

KAREN E. STAHL
NOTARY PUBLIC OF NEW JERSEY
Commission # 50110522

KAREN E. STAHL
NOTARY PUBLIC OF NEW JERSEY
Commission # 50110522

KAREN E. STAHL
NOTARY PUBLIC OF NEW JERSEY
Commission # 50110522



"An Internationally Accredited Agency"

New Jersey Is An Equal Opportunity Employer
Printed on Recycled Paper and Recyclable



ANAB
 American National Accreditation Board
 ACCREDITED
 ISO 9001:2015
 CALIBRATION LABORATORY
 ANAB AC 3940.02

Certificate/SO Number: 5-F7L1K-20-1 Revision 0

As-Found: In Tolerance

Issue Date: Jul 22, 2025
Calibration Date: Jul 21, 2025
Due Date: Jul 21, 2025

Calibrated To: Manufacturer Specification
Calibration Procedure: 1-AC103519-2

Traceable Calibration: Laboratories have been audited and found in compliance with ISO/IEC 17025:2017. Accredited calibrations performed within the Lab Scope of Accreditation are indicated by the presence of the Accredited Body Logo and Certificate Number. Any measurements on an accredited calibration not covered by the Lab Scope of Accreditation are listed in the notes section of the certificate. SSC, NRC, CLAS or ANAB do not guarantee the accuracy of an individual calibration by accredited laboratories.

Transcat calibrations, as applicable, are performed in compliance with the requirements of the Transcat Quality Manual QMC-PQ-1-009, the customer Purchase Order and/or Quality Agreement requirements, ISO 9001:2015, ANSI/ASQ Z390-1-1999 (P2002), and ISO 10012:2003, as applicable. When specified contractually, the requirements of ISO TS 6949:2009, TQCFR21, TQCFR22, TQCFR23, TQCFR24, TQCFR25, TQCFR26, TQCFR27, TQCFR28, TQCFR29, TQCFR30, TQCFR31, TQCFR32, TQCFR33, TQCFR34, TQCFR35, TQCFR36, TQCFR37, TQCFR38, TQCFR39, TQCFR40, TQCFR41, TQCFR42, TQCFR43, TQCFR44, TQCFR45, TQCFR46, TQCFR47, TQCFR48, TQCFR49, TQCFR50, TQCFR51, TQCFR52, TQCFR53, TQCFR54, TQCFR55, TQCFR56, TQCFR57, TQCFR58, TQCFR59, TQCFR60, TQCFR61, TQCFR62, TQCFR63, TQCFR64, TQCFR65, TQCFR66, TQCFR67, TQCFR68, TQCFR69, TQCFR70, TQCFR71, TQCFR72, TQCFR73, TQCFR74, TQCFR75, TQCFR76, TQCFR77, TQCFR78, TQCFR79, TQCFR80, TQCFR81, TQCFR82, TQCFR83, TQCFR84, TQCFR85, TQCFR86, TQCFR87, TQCFR88, TQCFR89, TQCFR90, TQCFR91, TQCFR92, TQCFR93, TQCFR94, TQCFR95, TQCFR96, TQCFR97, TQCFR98, TQCFR99, TQCFR100, TQCFR101, TQCFR102, TQCFR103, TQCFR104, TQCFR105, TQCFR106, TQCFR107, TQCFR108, TQCFR109, TQCFR110, TQCFR111, TQCFR112, TQCFR113, TQCFR114, TQCFR115, TQCFR116, TQCFR117, TQCFR118, TQCFR119, TQCFR120, TQCFR121, TQCFR122, TQCFR123, TQCFR124, TQCFR125, TQCFR126, TQCFR127, TQCFR128, TQCFR129, TQCFR130, TQCFR131, TQCFR132, TQCFR133, TQCFR134, TQCFR135, TQCFR136, TQCFR137, TQCFR138, TQCFR139, TQCFR140, TQCFR141, TQCFR142, TQCFR143, TQCFR144, TQCFR145, TQCFR146, TQCFR147, TQCFR148, TQCFR149, TQCFR150, TQCFR151, TQCFR152, TQCFR153, TQCFR154, TQCFR155, TQCFR156, TQCFR157, TQCFR158, TQCFR159, TQCFR160, TQCFR161, TQCFR162, TQCFR163, TQCFR164, TQCFR165, TQCFR166, TQCFR167, TQCFR168, TQCFR169, TQCFR170, TQCFR171, TQCFR172, TQCFR173, TQCFR174, TQCFR175, TQCFR176, TQCFR177, TQCFR178, TQCFR179, TQCFR180, TQCFR181, TQCFR182, TQCFR183, TQCFR184, TQCFR185, TQCFR186, TQCFR187, TQCFR188, TQCFR189, TQCFR190, TQCFR191, TQCFR192, TQCFR193, TQCFR194, TQCFR195, TQCFR196, TQCFR197, TQCFR198, TQCFR199, TQCFR200, TQCFR201, TQCFR202, TQCFR203, TQCFR204, TQCFR205, TQCFR206, TQCFR207, TQCFR208, TQCFR209, TQCFR210, TQCFR211, TQCFR212, TQCFR213, TQCFR214, TQCFR215, TQCFR216, TQCFR217, TQCFR218, TQCFR219, TQCFR220, TQCFR221, TQCFR222, TQCFR223, TQCFR224, TQCFR225, TQCFR226, TQCFR227, TQCFR228, TQCFR229, TQCFR230, TQCFR231, TQCFR232, TQCFR233, TQCFR234, TQCFR235, TQCFR236, TQCFR237, TQCFR238, TQCFR239, TQCFR240, TQCFR241, TQCFR242, TQCFR243, TQCFR244, TQCFR245, TQCFR246, TQCFR247, TQCFR248, TQCFR249, TQCFR250, TQCFR251, TQCFR252, TQCFR253, TQCFR254, TQCFR255, TQCFR256, TQCFR257, TQCFR258, TQCFR259, TQCFR260, TQCFR261, TQCFR262, TQCFR263, TQCFR264, TQCFR265, TQCFR266, TQCFR267, TQCFR268, TQCFR269, TQCFR270, TQCFR271, TQCFR272, TQCFR273, TQCFR274, TQCFR275, TQCFR276, TQCFR277, TQCFR278, TQCFR279, TQCFR280, TQCFR281, TQCFR282, TQCFR283, TQCFR284, TQCFR285, TQCFR286, TQCFR287, TQCFR288, TQCFR289, TQCFR290, TQCFR291, TQCFR292, TQCFR293, TQCFR294, TQCFR295, TQCFR296, TQCFR297, TQCFR298, TQCFR299, TQCFR300, TQCFR301, TQCFR302, TQCFR303, TQCFR304, TQCFR305, TQCFR306, TQCFR307, TQCFR308, TQCFR309, TQCFR310, TQCFR311, TQCFR312, TQCFR313, TQCFR314, TQCFR315, TQCFR316, TQCFR317, TQCFR318, TQCFR319, TQCFR320, TQCFR321, TQCFR322, TQCFR323, TQCFR324, TQCFR325, TQCFR326, TQCFR327, TQCFR328, TQCFR329, TQCFR330, TQCFR331, TQCFR332, TQCFR333, TQCFR334, TQCFR335, TQCFR336, TQCFR337, TQCFR338, TQCFR339, TQCFR340, TQCFR341, TQCFR342, TQCFR343, TQCFR344, TQCFR345, TQCFR346, TQCFR347, TQCFR348, TQCFR349, TQCFR350, TQCFR351, TQCFR352, TQCFR353, TQCFR354, TQCFR355, TQCFR356, TQCFR357, TQCFR358, TQCFR359, TQCFR360, TQCFR361, TQCFR362, TQCFR363, TQCFR364, TQCFR365, TQCFR366, TQCFR367, TQCFR368, TQCFR369, TQCFR370, TQCFR371, TQCFR372, TQCFR373, TQCFR374, TQCFR375, TQCFR376, TQCFR377, TQCFR378, TQCFR379, TQCFR380, TQCFR381, TQCFR382, TQCFR383, TQCFR384, TQCFR385, TQCFR386, TQCFR387, TQCFR388, TQCFR389, TQCFR390, TQCFR391, TQCFR392, TQCFR393, TQCFR394, TQCFR395, TQCFR396, TQCFR397, TQCFR398, TQCFR399, TQCFR400, TQCFR401, TQCFR402, TQCFR403, TQCFR404, TQCFR405, TQCFR406, TQCFR407, TQCFR408, TQCFR409, TQCFR410, TQCFR411, TQCFR412, TQCFR413, TQCFR414, TQCFR415, TQCFR416, TQCFR417, TQCFR418, TQCFR419, TQCFR420, TQCFR421, TQCFR422, TQCFR423, TQCFR424, TQCFR425, TQCFR426, TQCFR427, TQCFR428, TQCFR429, TQCFR430, TQCFR431, TQCFR432, TQCFR433, TQCFR434, TQCFR435, TQCFR436, TQCFR437, TQCFR438, TQCFR439, TQCFR440, TQCFR441, TQCFR442, TQCFR443, TQCFR444, TQCFR445, TQCFR446, TQCFR447, TQCFR448, TQCFR449, TQCFR450, TQCFR451, TQCFR452, TQCFR453, TQCFR454, TQCFR455, TQCFR456, TQCFR457, TQCFR458, TQCFR459, TQCFR460, TQCFR461, TQCFR462, TQCFR463, TQCFR464, TQCFR465, TQCFR466, TQCFR467, TQCFR468, TQCFR469, TQCFR470, TQCFR471, TQCFR472, TQCFR473, TQCFR474, TQCFR475, TQCFR476, TQCFR477, TQCFR478, TQCFR479, TQCFR480, TQCFR481, TQCFR482, TQCFR483, TQCFR484, TQCFR485, TQCFR486, TQCFR487, TQCFR488, TQCFR489, TQCFR490, TQCFR491, TQCFR492, TQCFR493, TQCFR494, TQCFR495, TQCFR496, TQCFR497, TQCFR498, TQCFR499, TQCFR500, TQCFR501, TQCFR502, TQCFR503, TQCFR504, TQCFR505, TQCFR506, TQCFR507, TQCFR508, TQCFR509, TQCFR510, TQCFR511, TQCFR512, TQCFR513, TQCFR514, TQCFR515, TQCFR516, TQCFR517, TQCFR518, TQCFR519, TQCFR520, TQCFR521, TQCFR522, TQCFR523, TQCFR524, TQCFR525, TQCFR526, TQCFR527, TQ

Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

†Recent documents the inaccuracy of measurements to the SI unit through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national measurement institutes (184). But are disparities to the CPTM Mutual Recognition Arrangement, or accepted International and/or national physical constants, or by the use of specific methods, consensus standards or rules two measurements.

Uncertainties are reported with a coverage factor $k=2$, providing a level of confidence of approximately 95%. All calibrations have been performed using processes having a TUR of 4:1 or better (3:1 for mass calibrations), unless otherwise noted. The Total Uncertainty Ratio (TUR) is calculated in accordance with NIST Interim IR-10. For mass calibrations, conventional mass referenced to 8.0000 g.

The results in this report relate only to the item collected or tested. Recorded information is valid at the time of collection within the stated uncertainties at the environmental conditions noted. The determination of compliance to this specification is specific to the material as it is, not references above based on the tolerances shown; these tolerances are either the original equipment manufacturer's (OEM's) nominal specifications or the client's requested specifications. Any number of factors can cause a unit to fall out of tolerance at any time following its collection. Limitations on the uses of this instrument are detailed in the OEM's operating instructions. This certificate may not be reproduced except in full, without the written approval of Transcel. Additional information is applicable (as indicated by asterisks) to this instrument as of the date of this report (as indicated by asterisks in parentheses).


Only Received: July 03, 2025
Service Level: R9

Certificate - Page 1 of 5
Reprinted on December 03, 2025

Customer Number: 1-659111-000
OPS.F20-014R11-072723 FP00180 4/2/2021

CALIBRATED BY TRANSCORP CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7266 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: S10430368143



Certificate/SO Number: 5-F7L1K-20-1 Revision 0

As Found/As Left Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Found / As Left	Cal Process Uncertainty (k=2, 1)	Measurement Uncertainty (k=2, 1)	Units	TUR
Function Checks									
Bubble Check			P	P	P				
Salt Check			P	P	P				
Temperature Source: Accuracy Test									
Accuracy Test	34.00°C	±(0.02 °C)	33.98	34.02	33.99 °C	1.6e-002	1.6e-002	°C	1.3 : 1
Temperature Source: Stability Test									
Stability Test	0.00°C	±(0.02 °C)	-0.02	0.02	0.00 °C	1.6e-002	1.6e-002	°C	1.3 : 1

Field not applicable.

Traceable Standards

Asset	Manufacturer	Model Number	Description	Cal Date	Due Date	Traceability Number	Use
0311395	AccuMap Corporation	AM1760-12-S	Secondary SPRT	8-Aug-24	31-Aug-25	16-J06H1395-2-1	AP/AL
HF227312	Hart Scientific/Phuke	1576	Super Thermometer	10-Jul-24	31-Jan-26	5-41P927312-9-1	AP/AL

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.

Environmental Data

Temperature	Relative Humidity	Temp / RH Asset	Lab Area	Lab Description
68.80 F / 20.50°C	58.60%	DowK11	G	Temperature

Decision Rule

When compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines as follows: The acceptance zone is defined as: less than or equal to the high limit, and/or greater than or equal to the low limit. The rejection zones are defined as: greater than the high limit and/or less than the low limit. Single measurement results in the acceptance zone

Date Received: July 03, 2025
Service Level: R9

Certificate - Page 2 of 5
Revised on December 03, 2023

Customer Number: 1-859111-090
CPS: F00-0411 072723 FF0010 4/8/2023

CALIBRATED
BY TRANSCOTT

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7235 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: S104303668143



Certificate/ISO Number: 5-F7L1K-20-1 Revision 0

are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT). When all measurement results are in the acceptance zone for repeated measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection zone, will cause the test to be identified as out-of-tolerance (OOT). Data rejection for cause, (outliers) is permitted after the "Defining and Verifying Out Of Tolerance (OOT) and/or Op Fail Readings" procedure outlined in this document has been completed and the anomalous reading cannot be repeated, and the anomalous reading does not represent the system under test. Statements of conformity are binary.

Date Received: July 03, 2025
Service Level: R9


Certificate - Page 3 of 5
Reprinted on December 03, 2025

Customer Number: 1-658111-000
OPS-EPD-014R11 0727203 F901R9-405021

CALIBRATED
BY **TRANSAT**

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: S104303661143



Certificate/ISO Number: 5-F7L1K-20-1 Revision 0

Legend

Topic	Description
Accuracy	UUT specification that establishes expected tolerances and a time limit (calibration interval) over which the instrument is expected to hold these tolerances
As Found	Initial measurement results
As Left	Measurement results after adjustment and/or repair
Blank Data Field	Test is not applicable for the UUT
Cal Process Uncertainty (CPU)	The uncertainty of calibration process for the reported measurement result
Calibration Date	Indicates the date that the calibration was completed
Cover Factor (K)	A measure of uncertainty that defines an interval about the measurement result
Due Date	Indicates the end of this calibration cycle as requested by the customer
Issue Date	Indicates the date that the calibration has passed the Data Review Process and was signed by an authorized signatory or the date that a revision to the original certificate has been issued
Low / High Limits	Establishes UUT acceptable performance limits for the test measurement
Measurement Uncertainty	The dispersion of the values attributed to a measured quantity
DOA	Out of Acceptance (#)
OOT	Out of Tolerance (%)
Setpoints	Measurement target values
Traceability	Unbroken chain of comparisons relating an instrument's measurements to a known standard(s)
Traceability Number	Unique identifier(s) used to document traceability of calibration standards
TUR	Test Uncertainty Ratio, ratio of the tolerance or specification of the test measurement in relation to the uncertainty in measurement results
UUT	Unit Under Test


Date Received: July 03, 2025
Service Level: H8

Certificate - Page 4 of 5
Revised on December 03, 2023

Customer Number: 1-659111-000
CPS-F20-014R1 07/27/23 PP01/06-4/05/21

CALIBRATED

Customer: DRAEGER INC



Certificate/SC Number: 5-F7L1K-20-1 Revision 0

Facility Responsible:

Houston, TX 77064

1. **Introduction**
 2. **Background**
 3. **Methodology**
 4. **Results**
 5. **Discussion**
 6. **Conclusion**
 7. **References**
 8. **Appendix**
 9. **Index**
 10. **Table of Contents**
 11. **Abstract**
 12. **Keywords**
 13. **Subject Headings**
 14. **Summary**
 15. **Notes**
 16. **References**
 17. **Appendix**
 18. **Index**
 19. **Table of Contents**
 20. **Abstract**
 21. **Keywords**
 22. **Subject Headings**
 23. **Summary**
 24. **Notes**
 25. **References**
 26. **Appendix**
 27. **Index**
 28. **Table of Contents**
 29. **Abstract**
 30. **Keywords**
 31. **Subject Headings**
 32. **Summary**
 33. **Notes**
 34. **References**
 35. **Appendix**
 36. **Index**
 37. **Table of Contents**
 38. **Abstract**
 39. **Keywords**
 40. **Subject Headings**
 41. **Summary**
 42. **Notes**
 43. **References**
 44. **Appendix**
 45. **Index**
 46. **Table of Contents**
 47. **Abstract**
 48. **Keywords**
 49. **Subject Headings**
 50. **Summary**
 51. **Notes**
 52. **References**
 53. **Appendix**
 54. **Index**
 55. **Table of Contents**
 56. **Abstract**
 57. **Keywords**
 58. **Subject Headings**
 59. **Summary**
 60. **Notes**
 61. **References**
 62. **Appendix**
 63. **Index**
 64. **Table of Contents**
 65. **Abstract**
 66. **Keywords**
 67. **Subject Headings**
 68. **Summary**
 69. **Notes**
 70. **References**
 71. **Appendix**
 72. **Index**
 73. **Table of Contents**
 74. **Abstract**
 75. **Keywords**
 76. **Subject Headings**
 77. **Summary**
 78. **Notes**
 79. **References**
 80. **Appendix**
 81. **Index**
 82. **Table of Contents**
 83. **Abstract**
 84. **Keywords**
 85. **Subject Headings**
 86. **Summary**
 87. **Notes**
 88. **References**
 89. **Appendix**
 90. **Index**
 91. **Table of Contents**
 92. **Abstract**
 93. **Keywords**
 94. **Subject Headings**
 95. **Summary**
 96. **Notes**
 97. **References**
 98. **Appendix**
 99. **Index**
 100. **Table of Contents**
 101. **Abstract**
 102. **Keywords**
 103. **Subject Headings**
 104. **Summary**
 105. **Notes**
 106. **References**
 107. **Appendix**
 108. **Index**
 109. **Table of Contents**
 110. **Abstract**
 111. **Keywords**
 112. **Subject Headings**
 113. **Summary**
 114. **Notes**
 115. **References**
 116. **Appendix**
 117. **Index**
 118. **Table of Contents**
 119. **Abstract**
 120. **Keywords**
 121. **Subject Headings**
 122. **Summary**
 123. **Notes**
 124. **References**
 125. **Appendix**
 126. **Index**
 127. **Table of Contents**
 128. **Abstract**
 129. **Keywords**
 130. **Subject Headings**
 131. **Summary**
 132. **Notes**
 133. **References**
 134. **Appendix**
 135. **Index**
 136. **Table of Contents**
 137. **Abstract**
 138. **Keywords**
 139. **Subject Headings**
 140. **Summary**
 141. **Notes**
 142. **References**
 143. **Appendix**
 144. **Index**
 145. **Table of Contents**
 146. **Abstract**
 147. **Keywords**
 148. **Subject Headings**
 149. **Summary**
 150. **Notes**
 151. **References**
 152. **Appendix**
 153. **Index**
 154. **Table of Contents**
 155. **Abstract**
 156. **Keywords**
 157. **Subject Headings**
 158. **Summary**
 159. **Notes**
 160. **References**
 161. **Appendix**
 162. **Index**
 163. **Table of Contents**
 164. **Abstract**
 165. **Keywords**
 166. **Subject Headings**
 167. **Summary**
 168. **Notes**
 169. **References**
 170. **Appendix**
 171. **Index**
 172. **Table of Contents**
 173. **Abstract**
 174. **Keywords**
 175. **Subject Headings**
 176. **Summary**
 177. **Notes**
 178. **References**
 179. **Appendix**
 180. **Index**
 181. **Table of Contents**
 182. **Abstract**
 183. **Keywords**
 184. **Subject Headings**
 185. **Summary**
 186. **Notes**
 187. **References**
 188. **Appendix**
 189. **Index**
 190. **Table of Contents**
 191. **Abstract**
 192. **Keywords**
 193. **Subject Headings**
 194. **Summary**
 195. **Notes**
 196. **References**
 197. **Appendix**
 198. **Index**
 199. **Table of Contents**
 200. **Abstract**
 201. **Keywords**
 202. **Subject Headings**
 203. **Summary**
 204. **Notes**
 205. **References**
 206. **Appendix**
 207. **Index**
 208. **Table of Contents**
 209. **Abstract**
 210. **Keywords**
 211. **Subject Headings**
 212. **Summary**
 213. **Notes**
 214. **References**
 215. **Appendix**
 216. **Index**
 217. **Table of Contents**
 218. **Abstract**
 219. **Keywords**
 220. **Subject Headings**
 221. **Summary**
 222. **Notes**
 223. **References**
 224. **Appendix**
 225. **Index**
 226. **Table of Contents**
 227. **Abstract**
 228. **Keywords**
 229. **Subject Headings**
 230. **Summary**
 231. **Notes**
 232. **References**
 233. **Appendix**
 234. **Index**
 235. **Table of Contents**
 236. **Abstract**
 237. **Keywords**
 238. **Subject Headings**
 239. **Summary**
 240. **Notes**
 241. **References**
 242. **Appendix**
 243. **Index**
 244. **Table of Contents**
 245. **Abstract**
 246. **Keywords**
 247. **Subject Headings**
 248. **Summary**
 249. **Notes**
 250. **References**
 251. **Appendix**
 252. **Index**
 253. **Table of Contents**
 254. **Abstract**

Date Received: July 03, 2026

Certificate - Page 5 of 5

Customer Number: 1-652-111-000

Reviewed By

Electronically Signed By:

Josh Solsen

Calibrated By:

Electronically Signed By:

Joe Martinez Jul 22, 2026

CALIBRATED BY TRANSCAT CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: SUC4303700862



Certificate/ISO Number: 5-F8B2G-160-1 Revision 0

Manufacturer: Wilka Instr/Mensor Corp/Trend
Model Number: CPG2300
Description: Portable Barometer
Serial Number: 4100126W
ID: NONE

As-Found: Out Of Tolerance
As-Left: In Tolerance

Issue Date: Sep 03, 2025
Calibration Date: Sep 03, 2025
Due Date: Sep 03, 2026

Calibrated To: Manufacturer Specification

Calibration Procedure: 1-AC107288-0

Transcat Calibration Laboratories have been audited and found in compliance with ISO 9001:2015. Accredited calibrations performed within the Lab Scope of Accreditation are indicated by the presence of the Accrediting Body Logo and Certificate Number. Any measurements on an accredited calibration not covered by the Lab Scope of Accreditation are listed in the notes section of this certificate. SOC, NRC, CLAS or ANAB do not guarantee the accuracy of an individual calibration by accredited laboratories.

Transcat calibrations, as applicable, are performed in compliance with the requirements of the Transcat Quality Manual QAC-P01-000, the customer Purchase Order and/or Quality Agreement requirements, ISO 9001:2015, ANSI/ISO Z540.1-1994 (R2002), and ISO 10012:2003, as applicable. When specified contractually, the requirements of ISO TS 16949:2009, 10CFR21, 10CFR60 App. B, ASME NQA-1-2012, and ANSI/ISO Z540.3-2006 (R2013) are also covered.

Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

Transcat documents the traceability of measurements to the SI units through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national measurement institutes (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, or accepted fundamental and/or natural physical constants, or by the use of specified methods, consensus standards or ratio type measurements. Documentation supporting traceability information is available for review upon written request at a Transcat facility. The measured quantity and the measurement uncertainty are required for further dissemination of traceability.

Uncertainties are reported with a coverage factor $k=2$, providing a level of confidence of approximately 95%. All calibrations have been performed using processes having a TUR of 4:1 or better (3:1 for mass calibrations), unless otherwise noted. The Test Uncertainty Ratio (TUR) is calculated in accordance with NCSL International RP-18. For mass calibrations, conventional mass referenced to 8.0 g/cm³.

The results in this report relate only to the item calibrated or tested. Recurrent calibration data is valid at the time of calibration within the stated uncertainties at the environmental conditions noted. The determination of compliance to the specification is specific to the model/serial no./ID no. referenced above based on the tolerances shown; these tolerances are either the original equipment manufacturer's (OEM's) warranted specifications or the client's requested specifications. Any number of factors can cause a unit to drift out of tolerance at any time following its calibration. Limitations on the uses of this instrument are detailed in the OEM's operating instructions. This certificate may not be reproduced except in full, without the written approval of Transcat. Additional information, if applicable may be included on separate report(s).

Notes:

Unit received out of tolerance. Adjustments were made to meet customer specs.

The OOT readings were verified.

Date Received: August 08, 2025
Service Level: R9

Certificate - Page 1 of 6
Reprinted on September 04, 2025

Customer Number: 1-659111-000
OHS-F20-014R11 07/27/23 FP001109-4/9/2021

CALIBRATED

BY **TRANSQIT**

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7266 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-160-1 Revision 0

As Found Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Found	Cal Process		Units	TUR
						O T	Uncertainty (k=2; t)		
Pressure Measure: 552 to1172 mbara Range									
	550.10mbara	±(0.015% FS)	549.92	550.28	649.70 mbara	*	1.0e-002	1.2e-002	mbara 17.2 : 1
	610.03mbara	±(0.015% FS)	609.85	610.21	609.69 mbara	*	1.2e-002	1.3e-002	mbara 15.5 : 1
	690.39mbara	±(0.015% FS)	689.21	690.57	689.00 mbara	*	1.3e-002	1.4e-002	mbara 13.9 : 1
	734.30mbara	±(0.015% FS)	734.12	734.48	733.90 mbara	*	1.4e-002	1.5e-002	mbara 12.9 : 1
	804.66mbara	±(0.015% FS)	804.48	804.84	804.20 mbara	*	1.5e-002	1.6e-002	mbara 11.8 : 1
	884.93mbara	±(0.015% FS)	884.75	885.11	884.60 mbara	*	1.6e-002	1.7e-002	mbara 11.0 : 1
	924.93mbara	±(0.015% FS)	924.75	925.11	924.50 mbara	*	1.8e-002	1.9e-002	mbara 10.2 : 1
	985.23mbara	±(0.015% FS)	985.05	985.41	984.80 mbara	*	1.9e-002	2.0e-002	mbara 9.6 : 1
	1043.9mbara	±(0.015% FS)	1043.7	1044.1	1043.4 mbara	*	2.0e-002	2.1e-002	mbara 10.1 : 1
	1114.2mbara	±(0.015% FS)	1114.0	1114.4	1113.8 mbara	*	2.1e-002	2.2e-002	mbara 9.4 : 1
	1174.6mbara	±(0.015% FS)	1174.4	1174.8	1174.1 mbara	*	2.2e-002	2.3e-002	mbara 9.0 : 1
	924.93mbara	±(0.015% FS)	924.75	925.11	924.60 mbara	*	1.8e-002	1.9e-002	mbara 10.2 : 1
	884.93mbara	±(0.015% FS)	884.75	885.11	884.60 mbara	*	1.6e-002	1.7e-002	mbara 11.0 : 1
	804.65mbara	±(0.015% FS)	804.47	804.83	804.20 mbara	*	1.5e-002	1.6e-002	mbara 11.8 : 1

CALIBRATED
BY TRANSOT

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: SUC4303700862



Certificate/ISO Number: 5-F8B2G-160-1 Revision 0

As Left Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Left	O T	Cal Process Uncertainty (k=2, ±)	Measurement Uncertainty (k=2, ±)	Units	TUR
Pressure Measure: 552 to 1172 mbara Range										
	550.00mbara	±(0.015% FS)	549.80	550.26	550.00 mbara		1.0e-002	1.2e-002	mbara	17.2:1
	610.02mbara	±(0.015% FS)	609.84	610.20	609.90 mbara		1.2e-002	1.3e-002	mbara	15.5:1
	680.30mbara	±(0.015% FS)	680.20	680.66	680.30 mbara		1.3e-002	1.4e-002	mbara	13.9:1
	734.28mbara	±(0.015% FS)	734.10	734.46	734.20 mbara		1.4e-002	1.5e-002	mbara	12.9:1
	804.64mbara	±(0.015% FS)	804.46	804.82	804.60 mbara		1.5e-002	1.6e-002	mbara	11.8:1
	864.92mbara	±(0.015% FS)	864.74	865.10	864.90 mbara		1.6e-002	1.7e-002	mbara	11.0:1
	924.92mbara	±(0.015% FS)	924.74	925.10	924.90 mbara		1.8e-002	1.9e-002	mbara	10.2:1
	985.22mbara	±(0.015% FS)	985.04	985.40	985.30 mbara		1.9e-002	2.0e-002	mbara	9.6:1
	1043.8mbara	±(0.015% FS)	1043.6	1044.0	1043.9 mbara		2.0e-002	2.1e-002	mbara	10.1:1
	1114.2mbara	±(0.015% FS)	1114.0	1114.4	1114.3 mbara		2.1e-002	2.2e-002	mbara	9.4:1
	1174.6mbara	±(0.015% FS)	1174.4	1174.8	1174.8 mbara		2.2e-002	2.3e-002	mbara	9.0:1
	924.92mbara	±(0.015% FS)	924.74	925.10	924.90 mbara		1.8e-002	1.9e-002	mbara	10.2:1
	864.92mbara	±(0.015% FS)	864.74	865.10	864.90 mbara		1.6e-002	1.7e-002	mbara	11.0:1
	804.64mbara	±(0.015% FS)	804.46	804.82	804.60 mbara		1.5e-002	1.6e-002	mbara	11.8:1

Field not applicable.

Traceable Standards

Asset	Manufacturer	Model Number	Description	Cal Date	Due Date	Traceability Number	Use
DW118A	Fluke/DH Instruments	PG7601	Piston Gauge	31-Jul-25	31-Jul-26	5-8DW118A-20-1	AF/AL
DW11CA	Fluke/DH Instruments	MS-AMH-38	AMH Mass Set	6-Jun-25	30-Sep-25	5-8DW11CA-40-1	AF/AL
DW11LOW	Fluke/DH Instruments	PC-7100/7600-10-TC	Gas Piston-Cylinder Module	8-Apr-22	30-Apr-27	5-8DW11LOW-3-1	AF/AL
DW11MASS	Fluke/DH Instruments	MS-AMH-38	AMH Mass Set	5-Mar-25	31-Mar-26	5-8DW11MASS-12-1	AF/AL

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.

Date Received: August 06, 2025.

Service Level: R3

Certificate - Page 3 of 6

Reprinted on September 04, 2025

Customer Number: 1-659111-000

OPS-F20-014R11 07/27/23 EP001R9 4/9/2021

CALIBRATED
BY TRANSOT

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-160-1 Revision 0

Environmental Data

Temperature	Relative Humidity	Temp / RH Asset	Lab Area	Lab Description
72.72°F / 22.62°C	44.00%	Dew/K9	B	GP Pressure


Decision Rule

When compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines as follows: This acceptance zone is defined as: less than or equal to the high limit, and/or greater than or equal to the low limit. The rejection zones are defined as greater than the high limit and/or less than the low limit. Single measurement results in the acceptance zone are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT). When all measurement results are in the acceptance zone for repeated measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection zone will cause the test to be identified as out-of-tolerance (OOT). Data rejection for cause, (outliers) is permitted after the "Determining and Verifying Out Of Tolerance (OOT) and/or Op Fail Readings" procedure outlined in this document has been completed and the anomalous reading cannot be repeated, and the anomalous reading does not represent the system under test. Statements of conformity are binary.

CALIBRATED
BY TRANSAT

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700852



Certificate/SO Number: 5-F8B2G-160-1 Revision 0


Legend

Topic	Description
Accuracy	UUT specification that establishes expected tolerances and a time limit (calibration interval) over which the instrument is expected to hold these tolerances
As Found	Initial measurement results
As Left	Measurement results after adjustment and/or repair
Blank Data Field	Test is not applicable for the UUT
Cal Process Uncertainty (CPU)	The uncertainty of calibration process for the reported measurement result
Calibration Date	Indicates the date that the calibration was completed
Cover Factor (k)	A measure of uncertainty that defines an interval about the measurement result
Due Date	Indicates the end of the calibration cycle as requested by the customer
Issue Date	Indicates the date that the calibration has passed the Date Review Process and was signed by an authorized signatory or the date that a revision to the original certificate has been issued
Low / High Limits	Establishes UUT acceptable performance limits for the test measurement
Measurement Uncertainty	The dispersion of the values attributed to a measured quantity
OOA	Out of Acceptance (#)
OOT	Out of Tolerance (°)
Setpoints	Measurement target values
Traceability	Unbroken chain of comparisons relating an instrument's measurements to a known standard(s)
Traceability Number	Unique identifier(s) used to document traceability of calibration standards
TUR	Test Uncertainty Ratio, ratio of the tolerance or specification of the test measurement in relation to the uncertainty in measurement results
UUT	Unit Under test

CALIBRATED
BY **TRANSIT**

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-160-1 Revision 0

Calibrated At:
16115 Park Row
Houston, TX 77064

Facility Responsible:
16115 Park Row
Houston, TX 77064
800-828-1478



Date Received: August 08, 2025
Service Level: R9

Calibrated By:

Alex Spilker
Calibration Technician

Electronically Signed By:
Sep 03, 2025
01:30:28 -04:00

Reviewed By:

Josh Soileau
Lab Manager

Electronically Signed By:
Sep 04, 2025
05:53:22 -04:00

Certificate - Page 6 of 6
Reprinted on September 04, 2025

Customer Number: 1-659111-000
QPS-F20-014R11 07/27/23 FPD0160 46/2021

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130434779
Date: May 23, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.
CALGAZ LOT#: 302-403034216
ETHANOL IN NITROGEN

Manufactured Date: April 30, 2024
Product Expiration: April 30, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	264.1	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4507062
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130434779
Date: May 22, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.
CALGAZ LOT#: 302-402999655
ETHANOL IN NITROGEN

Manufactured Date: March 20, 2024
Product Expiration: March 20, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	104.2PPM	(0.040)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	107.9	(0.041)
REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM

N.M.I. TRACEABLE STANDARDS* ND28529 103.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401032

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1129327791

Date: April 10, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.

CALGAZ LOT#: 302-403008479

ETHANOL IN NITROGEN

Product Expiration: March 28, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	208.4PPM	(0.080)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	211.4	(0.081)
REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM

N.M.I. TRACEABLE STANDARDS*

ND28529

103.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: March 28, 2024

APPROVED BY: 

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401040NJ
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1126209454
Date: December 18, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.
CALGAZ LOT#: 302-402922402
ETHANOL IN NITROGEN

Product Expiration: December 14, 2026

COMPONENT	PPM	(BrAC)
ETHANOL	416.8PPM	(0.160)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	421.3	(0.162)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329


No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: December 14, 2023

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-8400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

DEPT OF LAW AND PUBLIC SAFETY

Sales order: 120656632

Date: May 31, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.

CALGAZ LOT#: 302-402757219

ETHANOL IN NITROGEN

Product Expiration: May 30, 2026

COMPONENT	PPM	(BrAC)
ETHANOL	781.5PPM	(0.300)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	785.4	(0.301)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: May 30, 2023

APPROVED BY: 

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

Fax: (410) 228-4251

DEPARTMENT OF
Traffic and Public Safety
This is to certify that

Anthony P. Rubbe

Breath Test Coordinator/Instructor

IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSIS PURSUANT TO CHAPTER 141 OF

THE LAWS OF NEW JERSEY IN THE OPERATION OF THE **Alcotest 9510**

A METHOD TO DETERMINE INTOXICATION

GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS **22nd** DAY OF **January**

TWO THOUSAND AND **Twenty Five**

[Signature]
COLONEL
NEW JERSEY STATE POLICE

[Signature]
ATTORNEY GENERAL
STATE OF NEW JERSEY

DEPARTMENT OF
Traffic and Public Safety
This is to certify that

Anthony P. Rubbe

New Jersey State Police

IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSIS PURSUANT TO CHAPTER 141 OF

THE LAWS OF NEW JERSEY IN THE OPERATION OF THE **Alcotest 9510**

A METHOD TO DETERMINE INTOXICATION

GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS **12th** DAY OF **October**

TWO THOUSAND AND **Twenty Three**

[Signature]
COLONEL
NEW JERSEY STATE POLICE

[Signature]
ATTORNEY GENERAL
STATE OF NEW JERSEY

ORIGINAL COURSE DATES

DATE	Refresher Course PLACE	INSTRUCTOR
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		

S.P. 2839 (Rev. 01/16)

ORIGINAL COURSE DATES

DATE	Refresher Course PLACE	INSTRUCTOR
1.	3-27-25 MCFA	<i>[Signature]</i>
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		

S.P. 2839 (Rev. 10/22)